


HumeGard® GPT specifications

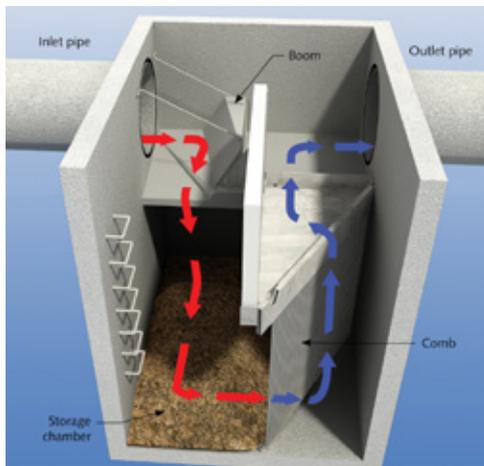

HumeGard® model range and dimensions

HumeGard® model	Pipe diameter or box culvert width (mm)	Width (m)	Length (m)	Depth from pipe invert (m)	Total pollutant capacity (m³)
HG12	300 - 375	1.8	2.0	1.39	2.0
HG15	450 - 525	1.8	2.0	1.36	2.0
HG18	525 - 675	2.0	2.1	1.10	2.5
HG24	600 - 825	2.7	2.5	1.70	6.8
HG27	750	3.0	2.5	1.60	6.7
HG30	750 - 900	3.4	2.5	2.20	10.6
HG30A	900	3.4	2.5	1.90	9.7
HG35	900	3.9	2.5	2.00	11.3
HG35A	1,050	3.9	2.5	1.80	10.2
HG40	900	4.4	2.9	2.00	14.5
HG40A	1,050	4.4	2.9	1.80	13.2
HG40B	1,200	4.4	2.9	1.60	8.9
HG45	1,200	4.9	2.9	2.10	18.3
HG45A	1,350	4.9	3.2	1.90	18.0
HG50 and larger	>1,500	5.3	3.5	2.00	>20.0

Note:

The unique design of the HumeGard® floating boom allows it to be modified to treat a wide range of flowrates. Contact Humes Water Solutions for details on the model to suit your project.

National sales 1300 361 601 | info@humeswatersolutions.com.au

As the specifications and details contained in this publication may change, please check with Humes Customer Service for confirmation of current issue. We accept no responsibility for any loss or damage resulting from any person acting on this information. Humes is a registered business name and a registered trademark of Holcim (Australia) Pty Ltd. HumeGard is a registered trademark of Holcim (Australia) Pty Ltd.
© July 2012 Holcim (Australia) Pty Ltd ABN 87 099 732 297